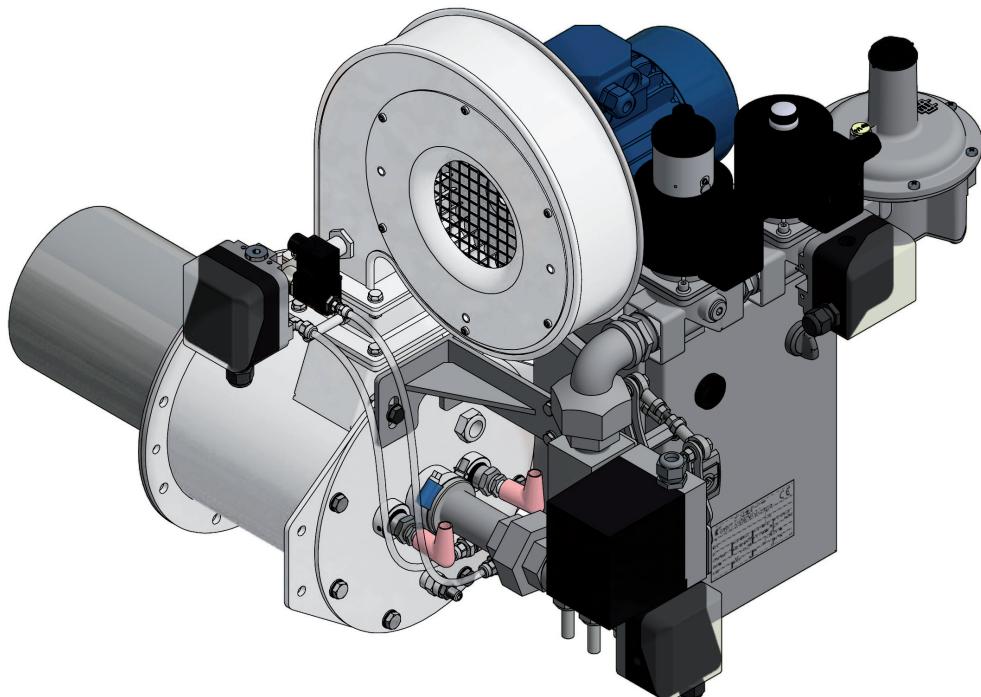


MB LMT 235**Monoblock High Ratio Regulation
THERMAL STEEL FLAME TUBE****MB LMT 235**

Maximum output [kW]	235
Minimum output (air/gas regulation) [kW]	8
Minimum output (fixed air) [kW]	10
Fuel pressure at maximum capacity (upstream of the stabilizer) [mbar]	Natural gas (8250 kcal/Nm ³)
	LPG (22500 kcal/Nm ³)
Operating conditions in the combustion chamber at maximum capacity [mbar]	Maximum back pressure
	Minimum depression
Flame length at maximum capacity [mm] (measured at the end of the burner body)	Natural gas (8250 kcal/Nm ³)
	LPG (22500 kcal/Nm ³)
Flame detection	Ionization flame detection electrode (UV cell on request)
Fuel	Natural gas (LPG and other gaseous fuel on request)

All information is based on laboratory tests in a neutral pressure chamber. Different conditions and chamber sizes can affect the data.

All information is based on a standard combustor design. Modifications to the combustor will alter performance and pressures.

All data are based on gross calorific values.

All information is based on tests conducted on generally acceptable air and gas piping systems.

Data reported in this technical sheet are subject to change without notice.

Performance data and dimensions are guidelines only and are not binding.



ECOFLAM reserves the right to modify the construction and / or configuration of its products at any time

CHARACTERISTICS OF THE BURNER

Fuel 1: CH4
 Fuel 1 diaphragm: Ø**


Fuel 2: LPG
 Fuel 2 diaphragm: Ø**

Comburent: Air
 Comburent diaphragm: Sp.15

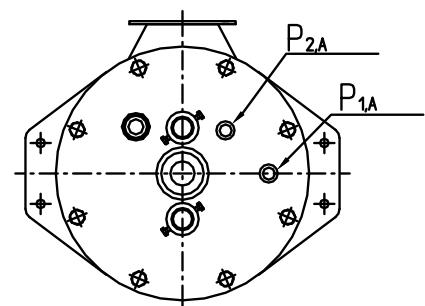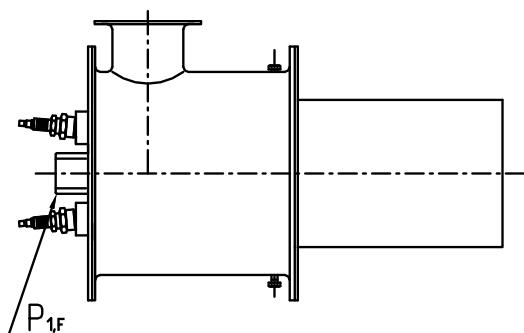


OPERATING RANGE

TYPICAL OPERATING RANGE

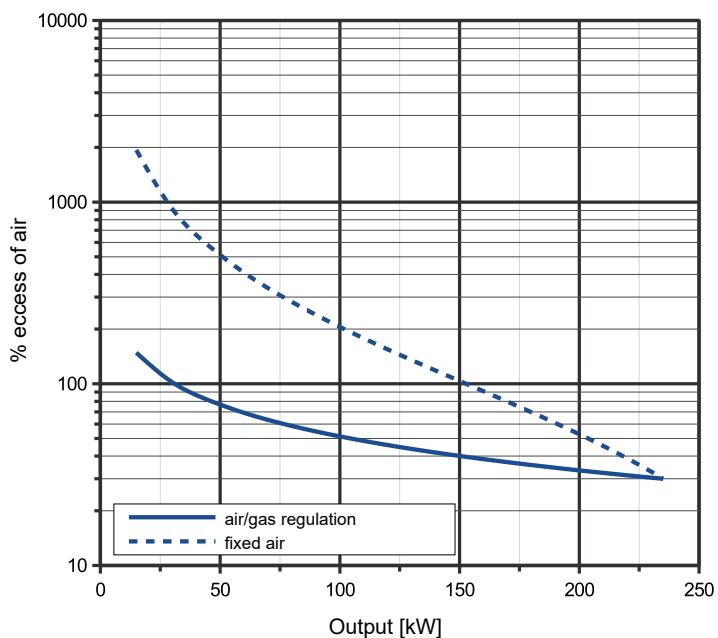

WORKING FIELD

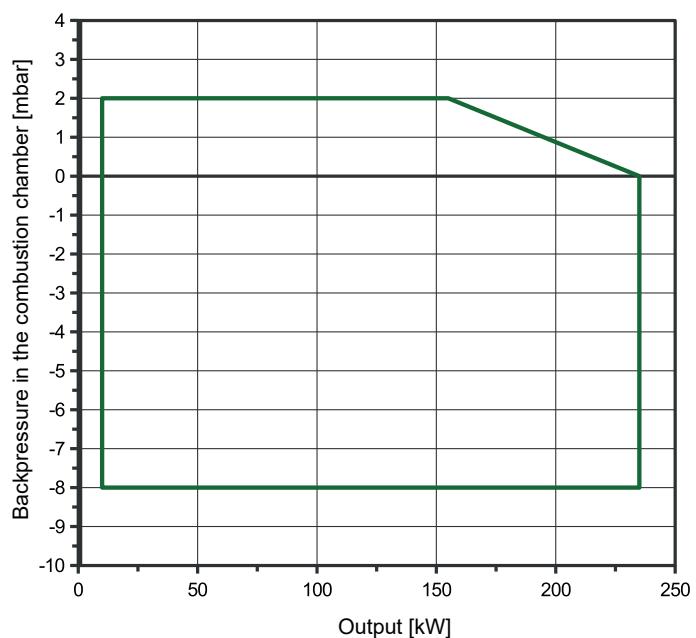

LEGENDA

Q_F Fuel flow

P_{1,F} Fuel pressure

Q_A Air flow

P_{1,A} Air pressure upstream the diaphragm



P_{2,A} Air pressure downstream the diaphragm

ΔP_A Differential pressure between ports 1 and 2

FLOW RATE CURVES

Q _F [Nm ³ /h]	FUEL	
	P _{1,F} [mbar]	
	Natural gas	LPG
1	0.02	0.46
2	0.09	1.85
3	0.21	4.17
4	0.38	7.41
5	0.59	11.58
6	0.84	16.67
7	1.15	22.69
8	1.50	29.64
9	1.90	37.51
10	2.35	
11	2.84	
12	3.38	
13	3.96	
14	4.60	
15	5.28	
16	6.00	
17	6.78	
18	7.60	
19	8.47	
20	9.38	
21	10.34	
22	11.35	
23	12.41	
24	13.51	

Q _A [Nm ³ /h]	AIR	
	P _{1,A} [mbar]	ΔP _A [mbar]
20	0.04	0.02
30	0.08	0.05
40	0.14	0.08
50	0.22	0.13
60	0.32	0.18
70	0.43	0.25
80	0.56	0.32
90	0.71	0.41
100	0.88	0.50
115	1.16	0.66
130	1.48	0.85
145	1.84	1.06
160	2.24	1.29
175	2.68	1.54
190	3.16	1.81
205	3.68	2.11
220	4.24	2.43
235	4.84	2.78
250	5.48	3.14
265	6.15	3.53
280	6.87	3.94
290	7.37	4.23
300	7.89	4.52
310	8.42	4.83

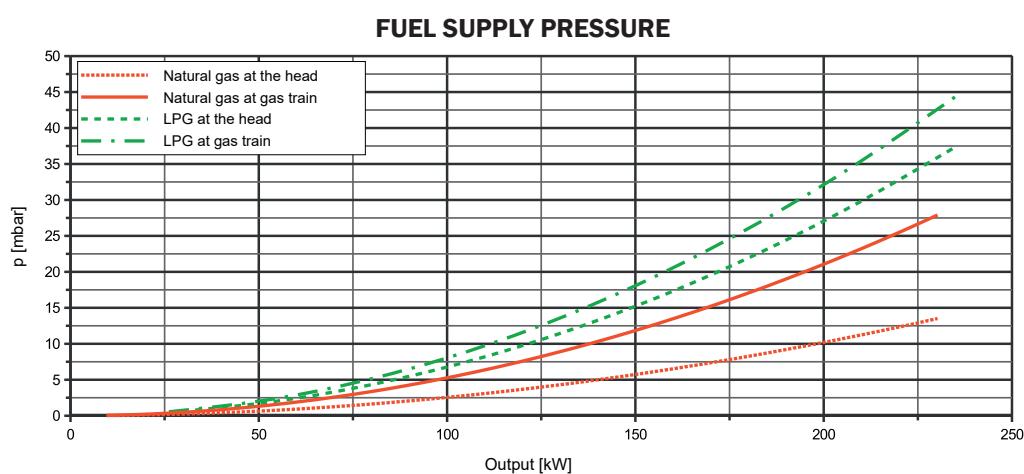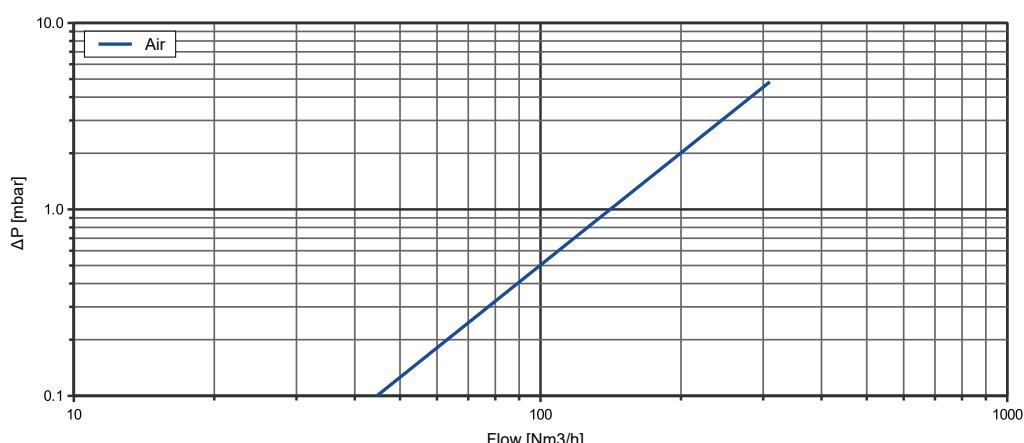

DIMENSIONS [mm]

