

# elco



PRODUCT RANGE **2018**

# 90<sup>TH</sup>

**Heating your life.  
Since 1928.**

*Since 1928 we have designed, manufactured and distributed high-tech burners for residential, commercial and industrial applications, a wide range of solutions, services and technologies developed during 90 years of presence on the field.*

## Our innovative soul

Since its foundation in 1928, ELCO has always been a specialist in burners conception and manufacturing. By linking a strong innovative ability to a developing will, ELCO has conceived performing and reliable burners as well as corresponding services throughout all these years, and is nowadays one of the leaders in the combustion technology.

## Our mission

ELCO always looks for the best technologies and develops new ones to improve the efficiency of its solutions. Our R&D Laboratories are committed to develop innovative technological solutions allowing to:

- optimize the running of the installations lowering the use of primary energy;
- ease professional's work improving human machine interface and maintenance;
- preserve the environment lowering acoustic and exhaust gas emissions.



Pirna, Germany



Resana, Italy

## Our product range

Our experience at combustion disposal in a complete range of burners from 11 kW to 80 MW:



### VECTRON

11 - 2300 kW  
Gas, light oil and  
dual fuel

### PROTRON

17 - 550 kW  
Gas and light oil

### NEXTRON

250 - 11200 kW  
Gas, light oil and  
dual fuel

### EK EVO

250 - 13000 kW  
Gas, light oil and  
dual fuel

### N

1300 - 22000 kW  
Gas, light oil and  
dual fuel



## Our competent advice

Your contacts at ELCO and its partners are recognized experts with years of experience.

Our worldwide support starts from concept creation to planning, design and project management up to commissioning and on-going operation of the plant throughout its life cycle.

As an ELCO customer, you can rely on your installation to perform reliably. Our guarantee is backed up by a service that sets standards in our field.

## Our worldwide network

Capitalising 90 years of working experience, ELCO has been capable to build loyal partnerships and today can count on reliable Partners all over the World.

Combining an instinctively global perspective with a genuinely multicultural approach ELCO today offers you skilled and experienced experts available in more than 70 Countries.

### In Europe

3 production plants

6 commercial branches



Strong commercial presence through a network of reliable dealers and partners

### Worldwide

2 Sales Offices in Russia and China

Distribution in over 70 Countries

ELCO is developing a worldwide network of valuable Service Partners, consisting of well-trained local engineers, to carry out its service operations

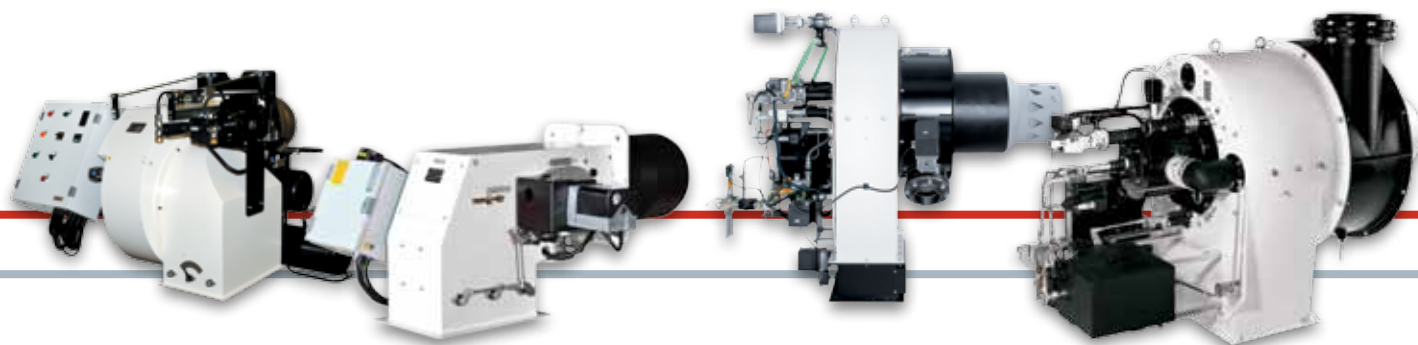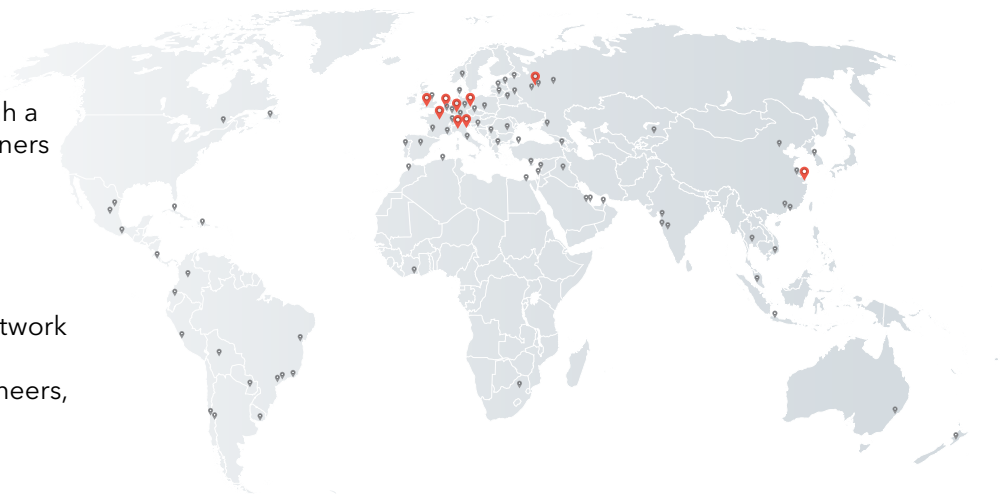

### HO/GHO-TRON

68 - 17000 kW  
Heavy oil and  
dual fuel

### D-TRON

230 - 34000 kW  
Gas, light oil, heavy oil  
and dual fuel

### EK-DUO


600 - 16000 kW  
Gas, light oil and  
dual fuel

### RPD

500 - 80000 kW  
Gas, light oil, heavy oil  
and dual fuel

# VECTRON

**MONOBLOCK BURNERS FROM 11 TO 2300 kW**  
GAS, LIGHT OIL AND DUAL FUEL

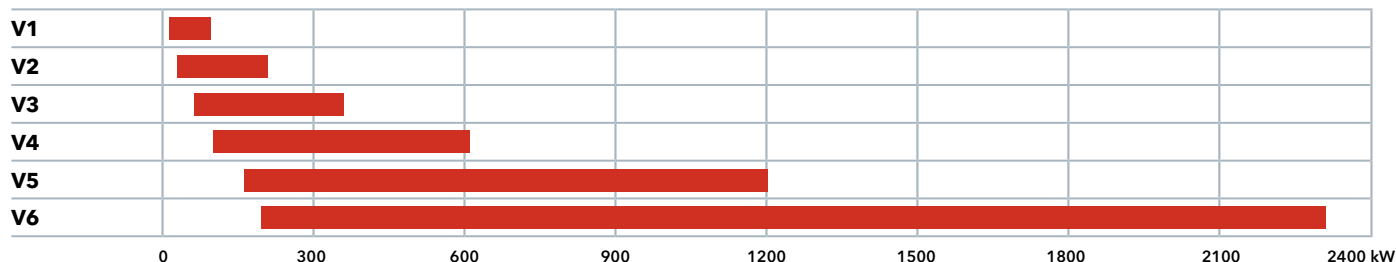

## An optimal combination of experience and innovation

With its gas and light oil burners series VECTRON, ELCO offers a product range capitalising 90 years of experience in the development of burners in all sizes.

All burners series VECTRON are characterized by ease of installation, adjustment and maintenance embedded in an excellent product engineering.

## Maintenance: rapid and easy

In order to grant cost benefits and high performance on all VECTRON models, ELCO implemented features that simplify commissioning and allow quick and efficient burner maintenance. For an easier maintenance, the combustion parts can be quickly removed, easily cleaned and, even when they are disassembled, they easily get back to their position after all the servicing work.



## Communication: an intuitive and interactive system

VECTRON has been the first range of ELCO to integrate the innovative MDE2 System and ELCOGRAM, a universal language composed of pictograms and numerical data. This ensures that information is easier to read than ever before, constantly giving real-time information to professional operators, during the commissioning, the operation and at each operation cycle.



# FOCUS ON VECTRON RANGE

Being historically present on those markets where the first low emission regulations were in force, ELCO has developed a long experience in the field of low NO<sub>x</sub> combustion technologies and is continuously focused on an environmental program with the target to offer efficient, reliable and advanced solutions to the customers.

## Environment: prefer a clean and silent technology

VECTRON burners are devoted to eco-friendly solution, granting reduced electrical consumption and being completely recyclable, packaging included.

Low emissions versions, capable not only to respect but also to exceed the requirements of the most stringent European directives, are also available:

- Low NO<sub>x</sub> class 3 in light oil (Blue and Eco models) (<120 mg/kWh) and in gas (<80 mg/kWh)
- Ultra Low NO<sub>x</sub> models in compliance with the ErP Directive (<120 mg/kWh in light oil and <56 mg/kWh in gas, based on GCV)
- Versions with FGR System able to reach NO<sub>x</sub> values below 30 mg/kWh



## ErP Ready Ultra Low NO<sub>x</sub> models

Thanks to innovative combustion technologies and the experience developed on the field, ELCO is able to offer an Ultra Low NO<sub>x</sub> range able to meet -or exceed- the highest requirements and comply with the European Emission Standards, as well as those of many other countries.

Focusing on the upcoming ErP Directive, ELCO is already able to offer a complete range of burners up to 400 kW. These models combine outstanding combustion performances with all the well-known technical features that have made VECTRON one of the most successful range of ELCO.

## FGR System to reach NO<sub>x</sub> emissions below 30 mg/kWh


The principle of external flue gas recirculation (FGR) consists in sending a mixture of comburent air and flue gas to the combustion head. This leads to an important reduction of the polluting emission released into the environment, lowering the impact of the combustion processes.

ELCO offers the FGR technology on VECTRON range on the models of the platforms VG5 and VG6.

Thanks to this technology, these burners are able to reach emissions below 30 mg/kWh, a result difficult to reach with the traditional combustion systems.



## MONOBLOCK BURNERS FROM 17 TO 550 kW GAS AND LIGHT OIL

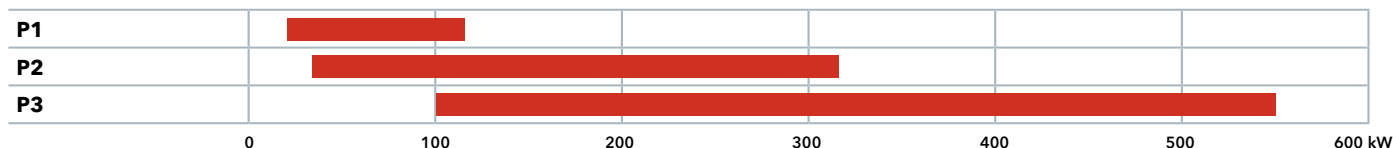

### The perfect choice for light industry

PROTRON range has been especially designed for light industry applications: heat resistant, compact layout, easy maintenance, integral protection cover, graphic display. PROTRON burners are characterized by high versatility allowing this range to be used in several installations within the process industry: ovens, dryers, spray booths, incinerators, hot air generators.



### High versatility in any installation

The range has been developed in order to fit to any installation requirement. PROTRON burners are available in two different machine architecture:

- cubic structure: fully enclosed burner with optimal accessibility and flexibility;
- gun structure: high performance ventilation and maximum compactness.

The maximum flexibility is granted by a wide choice of configuration: quick start, tightness control, adjustable pre-purge and post-purge, permanent ventilation.

### Reliability in all conditions

A necessary feature for process industry applications is the reliability, and the PROTRON range ensures it in all conditions, even when operating at high temperatures.


All PROTRON models have been designed with metal parts where high temperature can be reached, assuring the continuity of the operation even in the most extreme situations.



### Software programming for maximum flexibility

Each burner is configured in factory by our technicians according to the customer needs through a serie of parameters and options, such as quick start, tightness control, adjustable pre-purge and post-purge, permanent ventilation. To meet various application requirements 8 combinations of software programming are possible.

## MONOBLOCK BURNERS FROM 250 TO 11200 kW GAS, LIGHT OIL AND DUAL FUEL

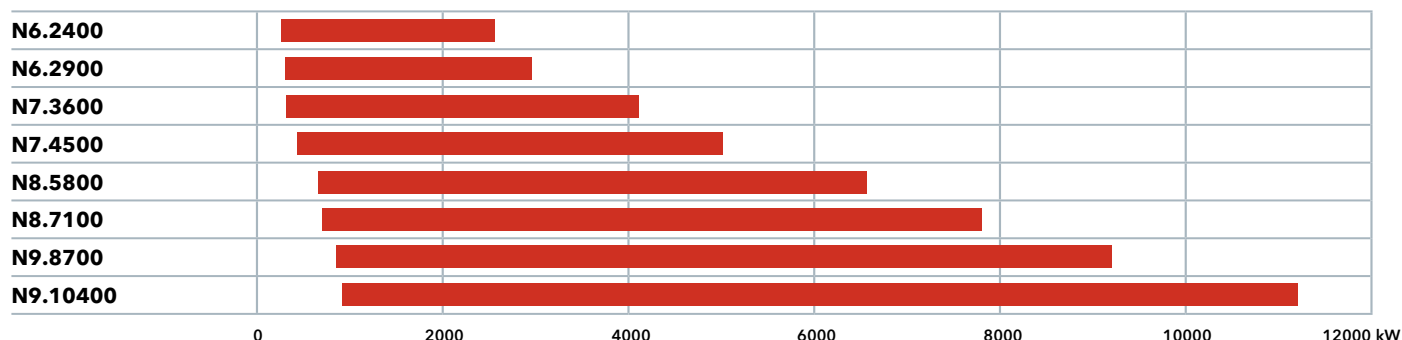

### Design: smooth and integral

The original design of NEXTRON® range is the result of a successful integration between burner and ELCO technologies. NEXTRON® burners are able to perfectly integrate themselves in any installation and professionals will appreciate the innovative construction that ease maintenance.




### Unique Low NOx performance

Developed and improved by ELCO R&D department, the Free Flame technology is a unique combustion process. This ELCO technology is capable to reach the NOx levels required by the most severe standards for all types of combustion chambers, whether they are 3-pass or reverse pass boilers.

### High acoustic comfort

The NEXTRON® burner range offers a high acoustic comfort thanks to the Low Noise System. The unique air intake channel is carefully designed to achieve an acoustic level significantly lower than 80 dB(A) up to 10 MW. This integrated and patented system on all NEXTRON® burners is definitely a good replacement of the traditional bulky sound proofing box.

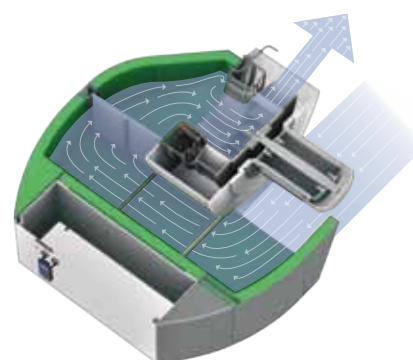


### Built-in and modular switch cabinet

All the NEXTRON® burners feature integrated switch cabinet, the ISC System, with modular concept for control devices and accessories: adjusting and safety control box, EMC protected power circuit of fan motor, display with command keyboard in front of the panel.

The ISC System houses options and accessories, such as the power regulator and the frequency inverter Variatron, and customizes each burner according to the installation needs.

# EK EVO

**MONOBLOCK BURNERS FROM 250 TO 13000 kW**  
GAS, LIGHT OIL AND DUAL FUEL

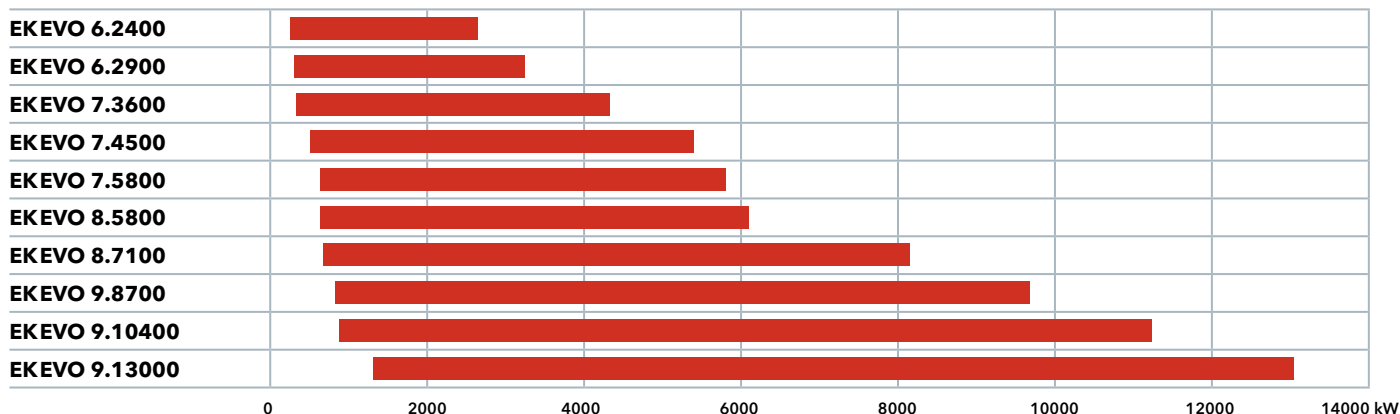

## Robust and professional structure

The design of the EKEVO® is the result of a successful synergy between ELCO key features and essential design.

EKEVO® introduces a brand new aluminium casting body and confirms the choice of ELCO about light colors and harmony of each shape.

Professionals will appreciate the flexibility of a 180° orientable air inlet, the compact switch box and the easy to clean glossy paint.



## A total advantage in terms of flexibility

The EKEVO® are characterized by their total flexibility of installation; they have been designed to be installed in different ways: up-firing, down-firing, upside-down or side-to-side (twin chamber boilers). Options and configurations have been foreseen in order to fulfill any application need.

## Electronics: easy and comprehensive

All EKEVO® models are fully electronically controlled and they are equipped with the exclusive ELCO man-machine interface allowing simple and effective programming operations.

## Smart solutions for easy maintenance

The maintenance of the EKEVO® burners can comfortably be carried out thanks to a wide opening above the housing, allowing easy access to the combustion components up to the fan, and thanks to the choice of the material: aluminium, lightweight to handle and resistant at the same time.

Maintenance operations are possible keeping the original combustion components' setup.





# FOCUS ON

## EK EVO RANGE

### Extension of the dual fuel range up to 13 MW

EK EVO burners in dual fuel operation are now available up to 13 MW, in Low NO<sub>x</sub> class 2 or class 3 configuration. All models are equipped with all the Systems that already have been implemented in the EK EVO range:

- ISC System with integrated and modular switch cabinet;
- MDE2 System for a user-friendly communication;
- RTC System to grant quick and efficient maintenance operations.



### New light oil range

The already known and appreciated EK EVO range is extended with the introduction of the new models in light oil operation.

ELCO is now able to provide the EK EVO burners in gas, light oil and dual fuel operation and completes one of its most successful burner range, assuring the same reliability and performance for all its different fuel configuration up to 13 MW.

### Ultra Low NO<sub>x</sub> version with FGR System

With the introduction of the new models in light oil configuration, the EK EVO series is now complete. The range includes burners able to easily respect the limits of 90 NO<sub>x</sub> mg/kWh in gas operation according to EN676 Standard and of 120 in light oil operation according to EN267 Standard.


Reducing polluting emissions is however an important target also for governments outside the European Region, and some countries are implementing stringent regulations to replace polluting plants. The geographical area which is currently of greatest interest to burner manufacturers is China, some regions of which requires NO<sub>x</sub> emission limits of less than 30 mg/kWh.

The currently available commercial technologies and equipment cannot satisfy such limits, except by employing the method of external flue gas recirculation (FGR).

ELCO implements the external FGR technology to reduce NO<sub>x</sub> emissions and satisfies even the most stringent regulations on all its EK EVO products in gas and dual fuel operation.



## MONOBLOCK BURNERS FROM 1300 TO 22000 kW GAS, LIGHT OIL AND DUAL FUEL

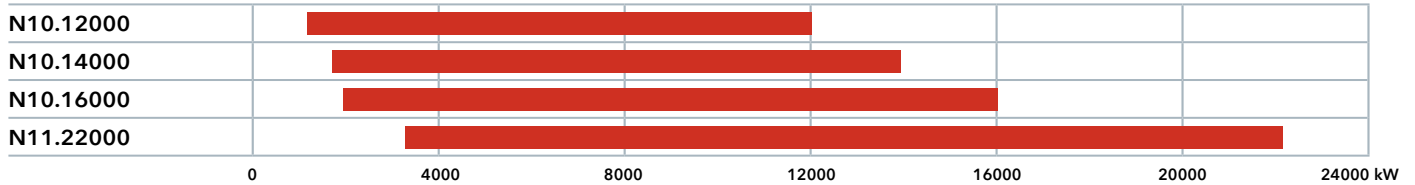

### High power and ease of use

Wherever a compact solution is needed, a monoblock burner offers advantages over individual components. However, above a power output of 10 MW, the conventional burner becomes too heavy: ease of handling during installation and maintenance work suffers, the strain on the boiler door is too high. The N burners solve this problem with innovative, weight-saving enclosure technology. The key feature is the physical division of the burner into a support frame and a separate air-routing housing.



### Ultra Low NOx technology, up to 22 MW

Thanks to the introduction of the new N11 model and the innovative solutions of this range, ELCO is able to provide high performance and ease of use on its monoblock range up to 22 MW.

The implementation of the FGR System enables to guarantee emissions of less than 30 mg/kWh for all the models of the N range.

### Simplified structure to improve usability

The burner head and the housing have been almost entirely separated in order to allow sufficient space for the combustion components to be easily removed. The air pipe between the housing and the burner head is simply closed by a removable cover. It is no longer necessary to pivot the entire body of the burner to one side or the other. An added advantage is the ability to fix the frame to the ground, depending on the application, thus relieving the generator door from any mechanical stress.




### Advanced design for low noise levels

Special attention has been paid to fan design. The burner's acoustic level meets industry standards, providing a more comfortable working environment.

The two main characteristics which limit the noise emitted by a fan are a high and constant static pressure and the use of a wheel with rearward facing blades. The result is a stable combustion and reduced noise at the air inlet.

# HO-TRON

## MONOBLOCK BURNERS FROM 68 TO 17000 kW HEAVY OIL

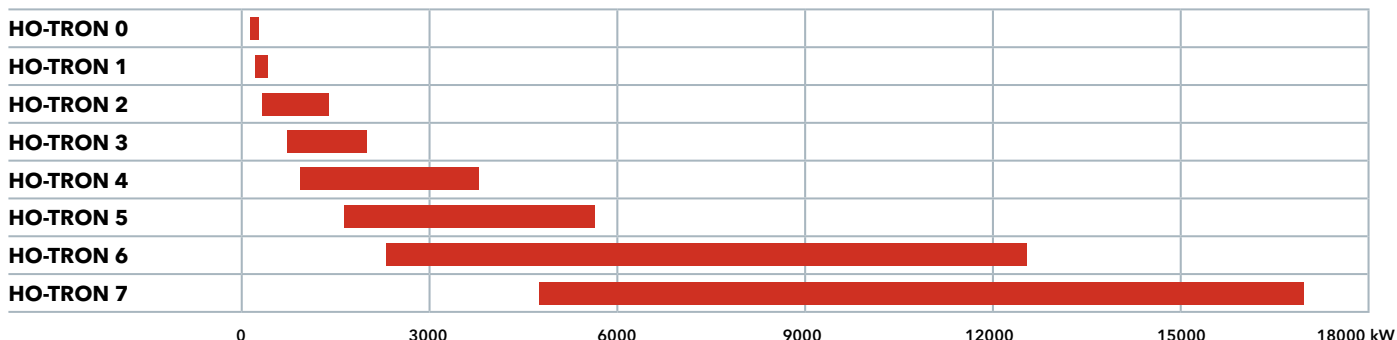

ELCO offers a wide range of heavy oil burners designed for traditional applications and industrial process applications. HO-TRON models for heavy oil up to 50°E at 50°C are available in the following configurations:


- one stage (HO-TRON 0-1);
- two stages (up to the model HO-TRON 5);
- two stage progressive mechanical operation (up to 17 MW).

All burners have easy access to the combustion component in order to simplify the maintenance operations. For a large extent of applications customised solutions can be offered in order to meet plants requirements. Ring system components for oil preparation can be designed and supply on request.



# GHO-TRON

## MONOBLOCK BURNERS FROM 410 TO 17000 kW DUAL FUEL (GAS/HEAVY OIL)

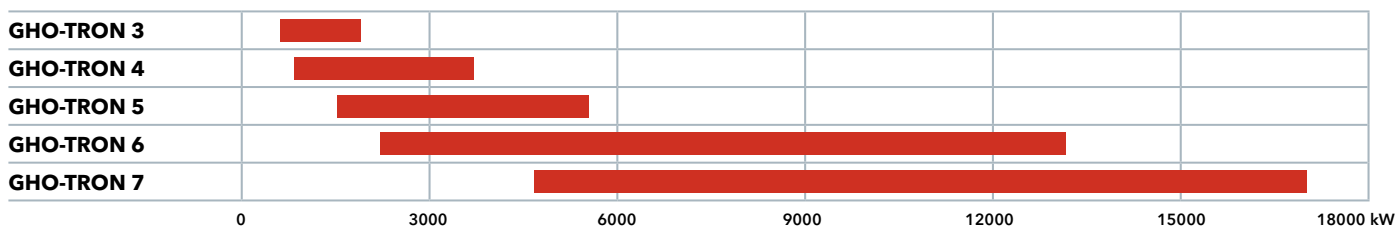


ELCO dual fuel GHO-TRON burners are suitable to work with natural gas or heavy oil up to 50°E at 50°C. GHO-TRON burners are available in two stages (GHO-TRON 3) and progressive version with electrical servomotor and double adjustable mechanical cam that allows air gas/heavy oil fine tuning (versions up to 17 MW).

Configured and special versions are available on request for selected type of applications and fuel characteristics.



# D-TRON

**DUOBLOCK BURNERS FROM 230 TO 34000 kW**  
GAS, LIGHT OIL, HEAVY OIL AND DUAL FUEL

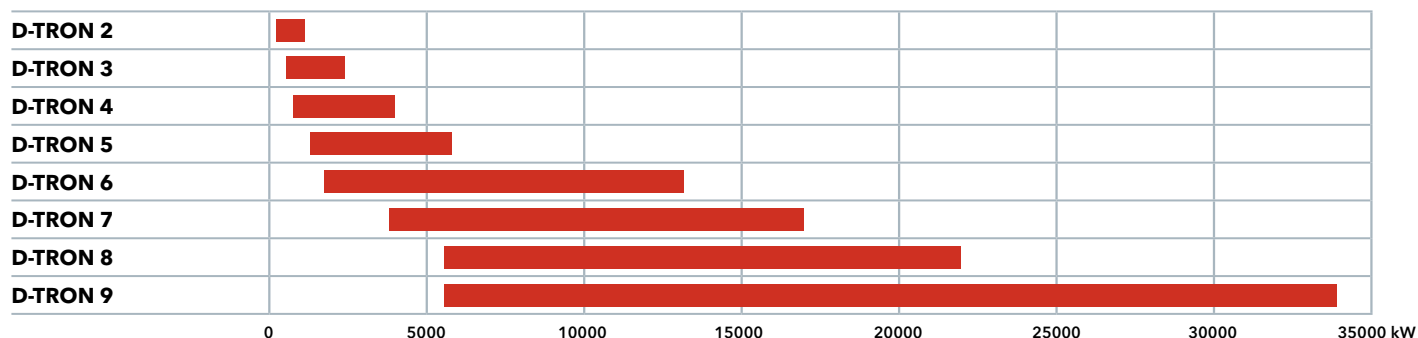


Thanks to their extreme flexibility and ease of use D-TRON burners are suitable for all types of installation up to 34 MW. Burners can be assembled with air duct connection in different layouts in order to meet a wide range of specifications in terms of performance and overall dimensions. Versions suitable to work with pre-heated combustion air up to 200°C can be used in order to achieve greater values of efficiency.



All D-TRON models feature easy maintenance: access to the combustion head and to the internal components is allowed from the housing top cover with a single operation, without removing the burner from the boiler. The clear layout allows rapid cleaning of the mechanical components, keeping the installation always in good conditions.

# EK-DUO


**DUOBLOCK BURNERS FROM 600 TO 16000 kW**  
GAS, LIGHT OIL AND DUAL FUEL

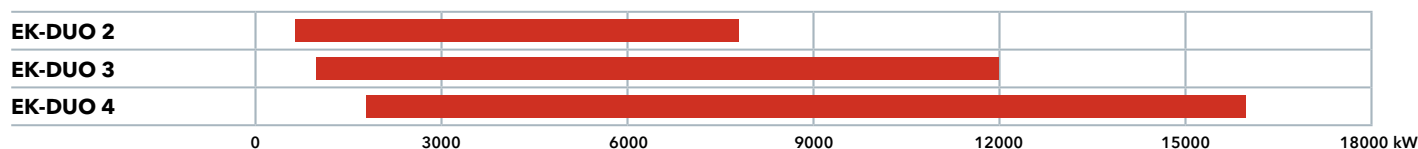

The EK-DUO models are high-performance burners offering well-engineered duoblock technology at an affordable price. These burners are predominantly used to burn standard fuels, i.e. domestic light oil and natural gas, and used in shell boilers, water tube boilers and thermal oil boilers. The separate fan installation of the burner allows to overcome high combustion chamber resistance. The tried-and-tested Diamond burner head for gas burners or the Free Flame burner head for oil or dual fuel burners grant high performance and low emissions, meeting the most stringent Low NOx requirements. The fuel-air mixture is adjusted solely using a modern electronic compound controller.




## DUOBLOCK BURNERS FROM 500 TO 80000 kW GAS, LIGHT OIL, HEAVY OIL AND DUAL FUEL

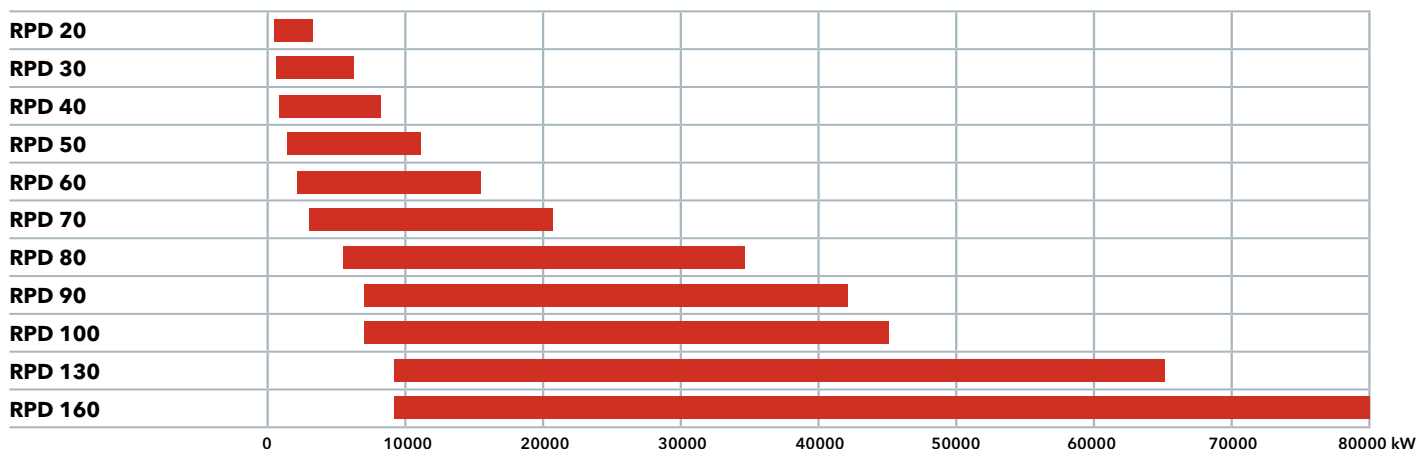

### All the benefits of the separate ventilation

Thanks to their extreme flexibility, RPD burners are suitable for almost any firing-related task. All RPD models are fitted with adjustable air deflector plates, which can be used to swirl the combustion air flowing. The flame configuration can hereby be directly influenced according to the geometry of the combustion chamber. The combustion head features optimized internal geometry to reduce head loss and the power demand of the fan motor.

Burner control regulation may be designed in accordance with the task and is, where possible, implemented via digital combustion manager as well as an electronic compound for a precise fuel-air ratio. For simpler tasks, mechanical compound systems are also available. Pre-heated combustion air up to 350°C can also be used in order to achieve greater energy-saving potential.

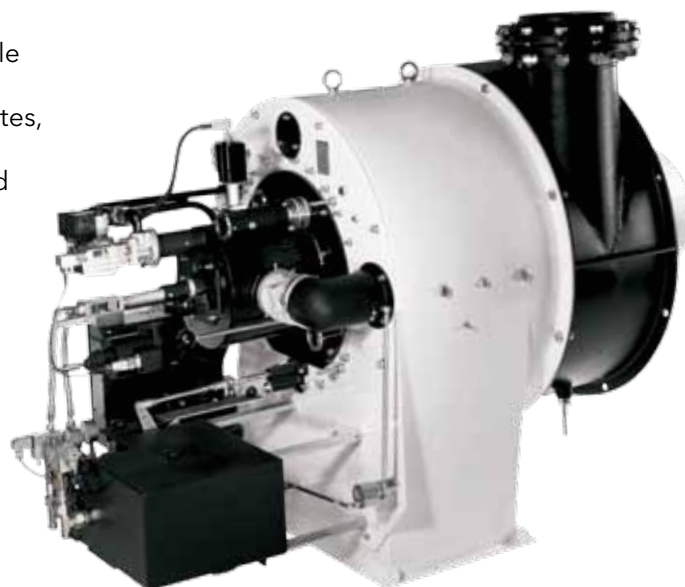

### Modularity and flexibility to meet any customer requirement

Thanks to its flexible, modular design and the fact that it is based on a wide range of solutions that have proved effective in practice, RPD burners are used anywhere where complex tasks and high technical requirements demand customised heating installation solutions.

Typical examples of use include:

- use with multiple gases and/or multiple liquid fuels, simultaneously;
- water tube boilers used in big heating installations and industrial processes with a remarkable thermal demand;
- refinery processes and chemical industry applications;
- waste incineration plants.



# TECHNOLOGIES AND SYSTEMS

To constantly improve its products, ELCO is committed to develop innovative technological solutions allowing to optimize the running of the installations, to ease professional's work, and naturally to preserve the environment. In order to provide quick responses to its market's exigencies, the range of ELCO burners is entirely conceived around a consistent combination of Systems.

## MDE2 SYSTEM

Permanent communication of information easy to use



Equipped with the MDE2 System, the universal language Elcogram and the 5-button keyboard, ELCO burners adjust themselves and constantly communicate to professional operators:

- real time information about each ignition and during the running;
- statistical information about burner operation recorded during the whole year before the maintenance operations.




### Elcogram, a universal language

As ELCO products are distributed worldwide, the company has developed a universal language composed of pictograms and numerical data. The pictograms use the majority of the symbols used on the wiring diagrams which are recognised and understood by all Nations. This ensures that information is easier to read than ever before.

"ELCOGRAM": universal language based on symbols and numerical data

Display shows all information for daily operation

Menu-driven burner setup and operation via keypad



## GEM SYSTEM

Electronic burner control: high safety and low costs



The use of electronic technologies in burner control systems helps to reduce running costs, improve reliability of operation and lower pollutant emissions. The electronic combustion manager used on ELCO burners are responsible not only for burner control (formerly the task of the traditional automatic combustion control unit) but also for fuel/air regulation. Data stored electronically has replaced the mechanical characteristic curve and help to achieve an unprecedented level of precision in air/fuel ratio regulation across the burner's entire control range, a prerequisite for efficient, energy- and cost-saving operation.

The GEM System controls the position of one or more activators simultaneously.

The servomotors of the air flow and oil components are controlled by a microprocessor which contains set points defined for each load curve. An additional advantage of the GEM is that it provides specific information on all the commands and states of the overall system: these can be accessed directly or by remote control.

The digital programming is user-friendly, it is carried out through the display of the MDE2 System or through a PC by using a simple procedure facilitated by easy instructions in a clear language.

## AGP SYSTEM

### An outstanding technology for gas burners



Developed and produced by ELCO, the AGP System (proportional air-gas) provides:

- perfect stability of the air-gas mixture;
  - a constantly high CO<sub>2</sub> content over the whole burner power range;
  - precise control of air excess, which is important for high-efficiency operation, in particular for condensing generators.
- The AGP measures: the gas pressure downstream of the gas train, the air pressure behind the flame holder, the furnace backpressure.

Any variations in the three pressures are immediately and simultaneously recorded by the system which automatically restores the correct gas/combustion air ratio.

AGP maintains a constant gas/combustion air ratio even in the presence of:

- positive or negative variations in the gas pressure;
- variations in air flow due to changes in the electrical supply voltage or fouling of the ventilation system;
- variations in the furnace and flue draft pressure on start-up and during load changes.

## VARIATRON

### Speed regulation: noise reduction and energy saving



To improve the performance of heating or industrial systems, ELCO applies Variatron (fan speed control). Conventionally, the air in modulating burners is regulated by an air flap. In the partial load range, a large amount of the air pressure generated by the ventilator goes to waste.

With speed regulation, the speed of the combustion-air fan is varied continuously depending on the burner output required. Full speed is reached only at maximum burner output. In the predominant partial load range, the lower speed translates into significant reductions in power consumption and noise emissions. The Variatron operates in phase with the air damper both with the GEM System and with the AGP System, which guarantees a combustion with minimum air excess by continuously monitoring all operating conditions.

Application of the Variatron to ELCO burners results in:

- electrical consumption savings of the order of 50%;
- turndown ratio of up to 1:10, resulting in perfect adaptation to system requirements and improvement in average seasonal efficiency, in particular with condensing or low-temperature boilers or specific processes;
- silent start-up and average overall noise reduction between 2 dB(A) (at maximum power) and 12 dB(A) (at minimum power).

## LOW NOISE SYSTEM

### Increase the comfort in-use and protect the environment



Among all the harmful things that men have to bear with every day, the most annoying is noise, which is difficult to reduce and expensive to get rid of.

This is the reason why ELCO has developed quiet burners both by selecting sound absorbent materials, and by treating each noise source internally. The main noise comes from the air intake and the air mixing in the fan wheel: all the ELCO burners are equipped with a sound trap on the air intake channel leading to the fan.

This brings the acoustic level to a compatible value in respect of the environment.

# TECHNOLOGIES AND SYSTEMS

ELCO R&D Laboratories have capitalised 90 years of experience in the field of standard burners (with normal emission) in order to develop a parallel range of low emissions burners. In addition to scrupulously respecting the limits prescribed by European directives regulating pollutant emission, the goal of ELCO is to guarantee values largely below those established by regulations. In order to reach these results the low NOx burner range takes advantage of innovative combustion technologies.



## DIAMOND HEAD


### Low emissions and reliable operation

The principle of the Diamond Head gas combustion is based on the internal recirculation of the combustion flue gases. These are partially drawn into the base of the flame via triangular openings positioned at the end of the combustion head.

The position and geometry of the gas injectors are such that a significant quantity of combustion flue gas is drawn in and rapidly mixed with air and gas at the root of the flame. This mixture crosses the main reaction area, slowing the combustion, which resulted in lowering the main flame temperature.

The result of this staging combustion is a significant reduction in the formation of thermal nitrogen oxides.

The advantage of this internal recirculation technique is an automatic adjustment to the quantity of recycled combustion flue gases: the volume of the flame is always as low as possible, which has a very minor effect on the nominal power of the generator, unlike external recirculation systems.

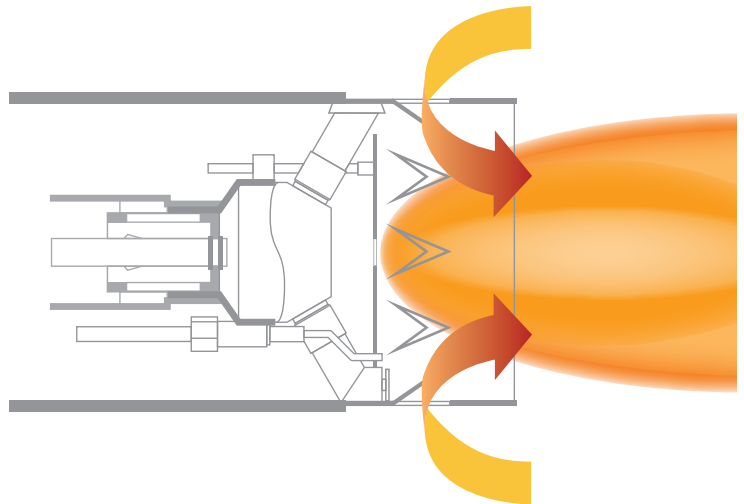


## FREE FLAME

### The pinnacle of low-polluting burner engineering

The principle of the Free Flame oil combustion is based on rapid gasification of the fuel by recirculating the combustion gases internally and allows the fuel-air to mix quickly. Once the fuel has been vaporized, it will burn and stabilize 30 centimetres from the combustion head.

The flame appears to "float freely" hence the name "Free Flame". The heat absorbed by the gasification oil will cause a significant drop in the flame's temperature and a decrease in the formation of the thermal nitrogen oxide.

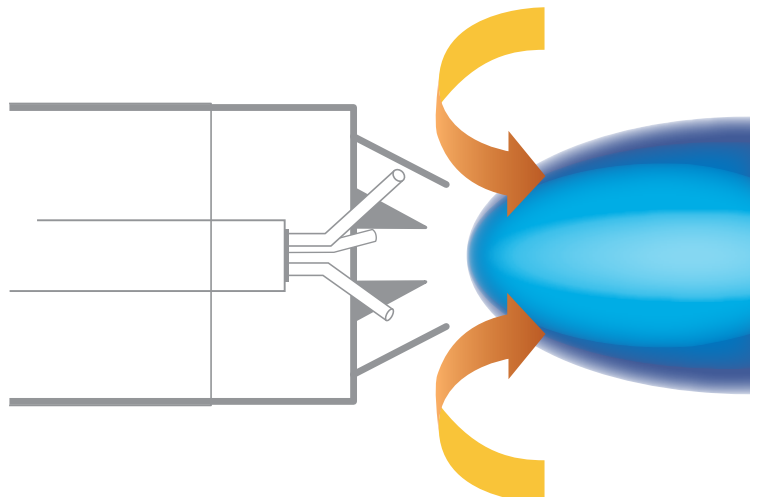

# CUSTOMER CARE

## Commissioning

For safe and efficient operation of your burner system it is very important that the burner is commissioned by an expert. The combustion will be optimally adjusted over the whole power range of the burner, and all the safeties will be tested. Of course you will receive a report. ELCO's service technicians are able, like no other, in performing this job adequate and competent, to run your installation worry-free.

## Maintenance and inspection

The burner is a crucial part of the installation. To keep your installation in good conditions, it is important to maintain the burner periodically. It is also very important to inspect all the safeties to ensure that your system operates safely.

Fortunately, you can rely on the professional services of ELCO which can perfectly perform this service for you.



## The Burner Academy

In order to respond to the needs of our customers we created the Burner Academy, a real school where the know-how of our technicians is diffused to our partners.

We provide the opportunity for boiler room personnel, operators and engineers to attend a series of training sessions carried out on our test bench by highly qualified instructors, who held the courses in English, German, French, Italian and Dutch language.

The Burner Academy uses various training locations where boilers are installed and where people can be trained in theory and in practice. We offer courses at different levels and also the possibility to handle all your needs in a customer-specific training.

## Reliable supply of spare parts

Spare parts have always had a great importance inside the ELCO world. Considering the high amount of parts involved in every single product, some of these parts might naturally need to be substituted ELCO can count on a International network ELCO offering original spare parts in order to guarantee the highest quality, reliability and safe continued operation of the appliance.



## Worldwide Service Network

In Western Europe, ELCO has a well organized service network.

Outside Western Europe ELCO uses a network of partners, consisting of well-trained local engineers, to carry out its service operations. These technicians are able to perform both commissioning and local service and they do it in a very professional way.



# WORLDWIDE REFERENCES



Stuttgart, Germany

Burner type:  
1x EK-DUO 2.550 GL-EUF  
2x EK-DUO 2.700 GL-EUF



Beijing, China

Burner type:  
2x N10.12000 G-EU2 FGR



Khanty-Mansiysk, Russia

Burner type:  
4x N10.12000 G-E



Amsterdam, Netherlands

Burner type:  
2x RPD 60 GL-EU



Beijing, China

Burner type:  
4x RPD 100 G-EU



Stavanger, Norway

Burner type:  
2x EK-DUO 3.1600 G-E





Hamburg, Germany

Burner type:  
2x **N7.4500 GL-E**



Beijing, China

Burner type:  
1x **EK EVO 8.5800 G-EU3 FGR**  
2x **EK EVO 8.7100 G-EU3 FGR**



Trondheim, Norway

Burner type:  
2x **N10.16000 G-EU FGR**



Sergiev Posad, Russia

Burner type:  
2x **N6.2900 G-R**  
2x **N7.3600 G-R**



Beijing, China

Burner type:  
1x **EK EVO 8.5800 G-EU3 FGR**  
2x **EK EVO 7.3600 G-EF3 FGR**



Saint Petersburg, Russia

Burner type:  
1x **EK-DUO 4.1600 G-EU2**

## Subsidiaries ELCO

<b>GERMANY</b>	ELCO GmbH Dreieichstraße 10 Mörfelden-Walldorf Tel.: +49 (0) 6105 287-287 Fax: +49 (0) 6105 287-199
<b>NETHERLANDS</b>	Elco Burners B.V. Meerpaalweg, 1 1332 BB Almere P.O. box 30048 1303 AA Almere Tel. +31 088 69 573 11 Fax +31 088 69 573 90
<b>SWITZERLAND</b>	Elcotherm AG Sarganserstrasse 100 7324 Vilters Tel. +41 (0)81 725 25 25 Fax +41 (0)81 723 13 59
<b>AUSTRIA</b>	ELCO Austria GmbH Aredstraße 16 - 18 2544 Leobersdorf Tel. +43 (0)2256 639 99 32 Fax +43 (0)2256 644 11
<b>UK &amp; IRELAND</b>	Ariston Thermo UK Ltd Suite 3, The Crown House Blackpole East, Blackpole Road, Worcester WR3 8SG Tel. +44 01905 788010 Fax +44 01905 788011
<b>FRANCE</b>	14, rue du Saule Trapu Parc d'activité du Moulin 91882 Massy Tel. +33 01 60 13 64 64 Fax +33 01 60 13 64 65
<b>ITALY</b>	Viale Roma, 41 28100 Novara Tel. +39 0732 633 590 Fax +39 0732 633 599
<b>RUSSIA</b>	Ariston Thermo RUS Eniseyskaya str. 1, bld 1, Office Center "LIRA" #415 129344 Moscow Tel. +7 495 213 0300 #5700 Fax +7 495 213 0302
<b>CHINA</b>	Ariston Thermo (China) Co., Ltd. 17A2, V-Capital Bldg No. 333 Xian Xia Road 200336 Shanghai Tel. +86 21 6039 8691 Fax +86 21 6039 8620

Contact us to know more  
about our products and solutions

**contact@elco-burners.com**